


TOROID CORES

T6~T100




Ordering Code System

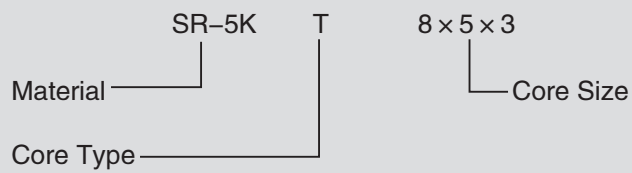

HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

sales@shiruitech.com
www.shiruitech.com

TOROID CORES




Dimensions in mm 尺寸				Core Set Parameters 磁芯参数					
Part No.	A	B	C	C1(mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Aw(mm ²)	W(g/set)
T6.3×3.4×2	6.30±0.25	3.40±0.30	2.00±0.20	5.16	14.31	2.77	39.68		0.2
T8×4×2	8.00±0.30	4.00±0.30	2.00±0.20	4.530	17.4	3.8	67	12.6	0.4
T8×4×3	8.00±0.30	4.00±0.30	3.00±0.30	3.020	17.4	5.8	100	12.6	0.6
T8×4×4	8.00±0.30	5.00±0.30	4.00±0.30	2.270	17.4	7.7	134	12.6	0.7
T8×5×3	8.00±0.30	4.00±0.30	3.00±0.30	4.49	19.69	4.38	86.23		0.4
T9×5×3	9.00±0.30	5.00±0.20	3.00±0.20	3.560	20.8	5.8	121	19.6	0.6
T10×6×4	10.00±0.30	6.00±0.30	4.00±0.25	3.080	24.1	7.8	188	28.3	0.9
T10×5×5	10.00±0.20	5.00±0.20	5.00±0.30	1.810	21.8	12.0	262	19.6	1.4
T12×6×4	12.00±0.30	6.00±0.30	4.00±0.25	2.270	26.1	11.5	301	28.3	1.6
T12.7×8.1×3.1	12.10±0.25	8.10±0.25	3.10±0.25	4.510	31.6	7.0	222	51.5	1.2
T12.7×7.1×4.7	12.70±0.30	7.10±0.30	4.70±0.25	2.300	29.4	12.8	376	39.6	1.9
T12.7×7.92×6.35	12.70±0.25	7.92±0.20	6.35±0.25	2.100	31.2	14.9	465	49.2	2.4
T12.7×8.1×6.35	12.70±0.25	8.10±0.25	6.35±0.25	2.200	31.6	14.4	454	51.5	2.3
T12.7×8.1×6	12.70±0.25	8.10±0.25	6.00±0.25	2.330	31.6	13.6	429	51.5	2.2
T12.8×7.9×7	12.80±0.30	7.90±0.30	7.00±0.25	1.86	31.28	16.78	525		2.7
T13×8×5	13.00±0.50	8.00 ^{+0.00} _{-1.00}	5.00±0.30	2.590	31.7	12.3	389	50.2	2.2
T13×8×6.5	13.00±0.50	8.00 ^{+0.00} _{-1.00}	6.50±0.30	1.990	31.7	15.9	506	50.2	2.8
T13×8×6	13.00±0.50	8.00 ^{+0.00} _{-1.00}	6.00±0.30	2.160	31.7	14.7	467	50.2	2.7
T13.2×7.37×4	13.20±0.30	7.37±0.30	4.00±0.30	2.70	3.055	11.30	345		1.8
T13.3×6.7×5	13.30±0.30	6.70±0.30	5.00±0.30	1.84	29.08	15.83	460		2.5
T13.9×7.57×7	13.90±0.50	7.57±0.30	7.00±0.30	1.48	31.73	21.45	680		3.6
T14×7.5×4	14.00±0.30	7.50±0.30	4.00±0.30	2.520	31.7	12.6	399	44.2	2.1
T14×8×4	14.00±0.20	8.00±0.20	4.00±0.20	2.810	32.8	11.7	384	50.2	2.0
T14×7.5×5	14.00±0.30	7.50±0.30	5.00±0.30	2.010	31.7	15.7	498	44.2	2.5
T14×9×5	14.00±0.30	7.50±0.30	5.00±0.30	2.840	35.0	12.3	430	63.6	2.2



HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

sales@shiruitech.com
www.shiruitech.com

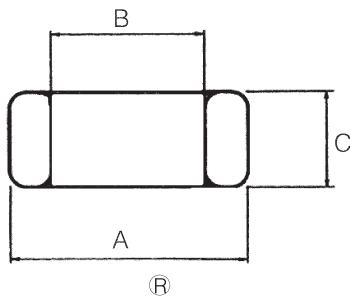

Note: 1)AL value

-Unit:nH/N²

-Measuring conditions:1kHz,0.25V25°C

-Tolerance: ± 25%(SR-10K,SR-12K: ± 30%)

2)Coating

-Toroid cores can be coated with epoxy or parylene.

-Isolation voltage:epoxy-DC 1000 V min,parylene-DC750Vmin

Electrical Characteristics AL value 电气特性								
Part No.	SR-4P	SR-2P	SR-5P	SR-5K	SR-6K	SR-7K	SR-10K	SR-12K
T6.3×3.4×2	580	730	600	1300	1400	1800	2400	2900
T8×4×2	670	730	690	1450	1700	2100	2800	3400
T8×4×3	1000	1150	1040	2150	2500	3100	4200	5000
T8×4×4	680	900	700	1600	1700	2100	2800	3400
T8×5×3	1300	1600	1400	2850	3300	4200	5500	6600
T9×5×3	800	1000	900	1850	2100	2600	3500	4200
T10×6×4	1000	1100	1000	2050	2400	3100	4100	4900
T10×5×5	1700	2000	1700	3550	4200	5200	6900	8300
T12×6×4	1300	1600	1400	2850	3300	4200	5500	6600
T12.7×8.1×3.1	700	750	700	1450	1700	2100	2800	3400
T12.7×7.1×4.7	1300	1500	1400	2750	3300	4100	5500	6600
T12.7×7.92×6.35	1400	1700	1500	3050	3600	4500	6000	7200
T12.7×8.1×6.35	1400	1600	1400	2950	3400	4300	5700	6800
T12.7×8.1×6	1600	2000	1600	3700	4000	5000	6700	8100
T12.8×7.9×7	1300	1500	1300	2750	3200	4000	5400	6500
T13×8×5	1200	1400	1200	2450	2900	3600	4900	5900
T13×8×6.5	1500	1800	1600	3300	3800	4700	6300	7600
T13×8×6	1400	1600	1500	3000	3500	4400	5800	7000
T13.2×7.37×4	1100	1400	1150	2500	2700	3450	4600	5500
T13.3×6.7×5	1600	200	1700	3700	4000	5100	6700	8000
T13.9×7.57×7	2000	2500	2100	4600	5000	6300	8400	10100
T14×7.5×4	1200	1400	1200	2600	3000	3700	5000	6000
T14×8×4	1100	1200	1100	2300	2700	3400	4500	5400
T14×7.5×5	1500	1800	1600	3200	3800	4700	6300	7600
T14×9×5	1100	1200	1100	2300	2700	3300	4400	5300





SHIRUI

HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

sales@shiruitech.com

www.shiruitech.com

TOROID CORES




Dimensions in mm 尺寸				Core Set Parameters 磁芯参数					
Part No.	A	B	C	C1(mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Aw(mm ²)	W(g/set)
T14×7.5×6.5	14.00±0.30	7.50±0.30	6.50±0.30	1.550	31.7	20.5	648	44.2	3.4
T14×7.5×7	14.00±0.30	7.50±0.30	7.00±0.30	1.440	31.7	22.0	698	44.2	3.5
T14×8×7	14.00±0.20	8.00±0.20	7.00±0.20	1.600	32.8	20.5	672	50.2	3.4
T16×12×4	16.00±0.30	12.00±0.30	4.00±0.30	5.460	43.4	8.0	345	113.0	1.7
T16×9.6×4	16.00±0.30	9.60±0.30	4.00±0.30	3.080	38.5	12.5	482	72.3	2.5
T16×12×5	16.00±0.30	12.00±0.30	5.00±0.30	4.370	43.4	9.9	431	113.0	2.1
T16×9.6×5	16.00±0.30	9.60±0.30	5.00±0.30	2.460	38.5	15.7	603	72.3	2.9
T16×9.6×6.3	16.00±0.30	9.60±0.30	6.30±0.30	1.950	38.5	19.7	760	72.3	3.9
T16×10×7	16.00±0.35	10.00±0.30	7.00±0.30	1.907	39.3	20.6	810	78.5	4.2
T16×12×8	15.80±0.30	11.90±0.30	8.00±0.30	2.790	42.9	15.4	661	111.2	3.4
T16×8×8	16.00±0.50	8.00±0.40	8.00±0.40	1.130	34.8	30.7	1071	50.2	5.7
T16×8×11	16.00±0.50	8.00±0.40	11.00±0.40	0.820	34.8	42.3	1472	50.2	7.6
T17.5×9.4×6	17.50±0.30	9.4±.30	6.00±0.30	1.69	39.65	23.50	932		4.9
T18×10×10	18.00±.30	10.00±0.30	10.00±0.30	1.07	41.54	38.82	1613		8.4
T19×10×5	19.00±0.30	9.80±0.40	5.00±0.30	1.900	42.1	22.2	934	75.4	4.7
T19×13×6	19.00±0.30	13.00±0.30	6.00±0.20	2.760	49.1	17.8	873	132.7	4.5
T19×13×9.5	19.00±0.30	13.00±0.30	9.50±0.25	1.741	49.1	28.2	1385	133	7.0
T19×10×10	19.00±0.40	9.80±0.40	10.30±0.30	0.920	42.1	45.7	1923	75.4	10.0
T19×12.7×10	19.00±0.40	12.70±0.30	10.00±0.30	1.56	48.48	30.97	1501		7.5
T19×13×11	19.00±0.30	13.00±0.30	11.00±0.20	1.510	49.1	32.6	1600	132.7	8.1
T19×5×16	19.00±0.40	5.00±0.15	16.00±0.40	0.290	28.7	99.1	2842	19.63	21.1
T19×5×19	19.00±0.40	5.00±0.15	19.00±0.40	0.244	28.7	117.6	3375	20	24.8
T20×10×7	20.00±0.40	10.00±0.30	7.00±0.30	1.290	43.6	33.6	1465	78.5	7.9
T20×10×8	20.00±0.40	10.00±0.30	8.00±0.30	1.130	43.6	38.4	1674	78.5	9.1
T20×10×10	20.00±0.40	10.00±0.30	10.00±0.30	0.910	43.6	48.1	2092	78.5	11.3



sales@shiruitech.com
www.shiruitech.com

HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

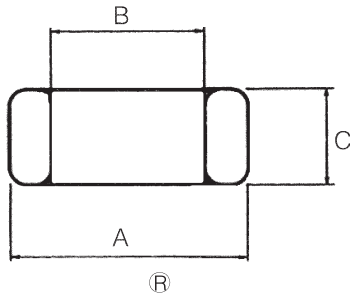

Note: 1)AL value

-Unit:nH/N²

-Measuring conditions:1kHz,0.25V, 25°C

-Tolerance: ± 25%(SR-10K,SR-12K: ± 30%)



2)Coating

-Toroid cores can be coated with epoxy or parylene.

-Isolation voltage:epoxy-DC 1000 V min,parylene-DC750Vmin

Electrical Characteristics AL value 电气特性								
Part No.	SR-4P	SR-2P	SR-5P	SR-5K	SR-6K	SR-7K	SR-10K	SR-12K
T14×7.5×6.5	1900	2250	2000	4200	4900	6100	8100	9700
T14×7.5×7	2100	2450	2200	4500	5200	6500	8700	10400
T14×8×7	1900	2300	2000	4000	4700	5900	7900	9500
T16×12×4	600	650	600	1300	1400	1700	2300	2800
T16×9.6×4	1000	1100	1000	2100	2400	3100	4100	4900
T16×12×5	700	800	700	1500	1700	2200	2900	3500
T16×9.6×5	1200	1400	1300	2700	3100	3800	5100	6100
T16×9.6×6.3	1500	1700	1600	3300	3900	4800	6400	7700
T16×10×7	1600	1900	1600	3400	4000	5600	6600	7900
T16×12×8	1100	1300	1100	2400	2700	3400	4500	5400
T16×8×8	2700	3200	2800	5700	6700	8300	11100	13300
T16×8×11	3700	4500	3800	7800	9200	11500	15300	18400
T17.5×9.4×6	1700	2200	1800	4000	4400	5500	7400	8900
T18×10×10	2800	3500	2900	6400	7000	8000	11000	13500
T19×10×5	1600	1500	1700	3400	4000	5000	6600	7900
T19×13×6	1100	1300	1100	2400	2700	3400	4600	5500
T19×13×9.5	1700	2100	1800	3700	4300	5400	7200	8600
T19×10×10	3300	4000	3400	6900	8200	10200	13700	16400
T19×12.7×10	1900	2400	2000	4400	4800	6000	8000	9600
T19×13×11	2000	2400	2100	4300	5000	6200	8300	1000
T19×5×16	10000	12500	10900	22200	26000	32600	43400	52100
T19×5×19	12000	15000	12900	26300	30900	38700	51500	61800
T20×10×7	2300	2500	2400	5000	5800	7300	9700	11600
T20×10×8	2700	3200	2800	5700	3700	8300	11100	13300
T20×10×10	3300	4100	3500	7000	8300	10400	13800	16600

TOROID CORES




Dimensions in mm 尺寸				Core Set Parameters 磁芯参数					
Part No.	A	B	C	C1(mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Aw(mm ²)	W(g/set)
T22.1 × 13.7 × 6.35	22.10 ± 0.40	13.70 ± 0.30	6.35 ± 0.25	2.070	54.2	26.2	1417	147.3	7.1
T22.1 × 13.7 × 8	22.10 ± 0.40	13.70 ± 0.30	8.00 ± 0.25	1.640	54.2	33.0	1785	147.3	9.1
T22.1 × 13.7 × 11	22.10 ± 0.40	13.70 ± 0.30	11.00 ± 0.25	1.190	54.2	45.3	2454	147.3	12.4
T22.1 × 13.7 × 12.7	22.10 ± 0.40	13.70 ± 0.30	12.75 ± 0.25	1.030	54.2	52.5	2845	147.3	14.0
T22 × 14 × 8	22.00 ± 0.40	14.00 ± 0.30	8.00 ± 0.20	1.740	54.7	31.5	1720	153.9	8.9
T22 × 14 × 13	22.00 ± 0.40	14.00 ± 0.30	13.00 ± 0.30	1.070	54.7	51.1	2795	176.0	15.0
T22.5 × 12.5 × 8	22.50 ± 0.30	12.50 ± 0.30	8.00 ± .30	1.34	51.94	38.77	2014		10.6
T25 × 15 × 3	25.00 ± 0.30	15.00 ± 0.30	3.00 ± 0.30	4.095	60.2	14.7	883	177	6.0
T25 × 15 × 4	25.00 ± 0.30	15.00 ± 0.30	4.00 ± 0.30	3.071	60.2	19.6	1170	177	7.0
T25 × 15 × 5	25.00 ± 0.30	15.00 ± 0.30	5.00 ± 0.30	2.457	60.2	24.5	1475	177	7.5
T25 × 15 × 6	25.00 ± 0.30	15.00 ± 0.30	6.00 ± 0.30	2.050	60.2	29.4	1767	176.6	9.0
T25 × 15 × 10	25.00 ± 0.30	15.00 ± 0.30	10.00 ± 0.30	1.230	60.2	48.9	2944	176.6	15
T25 × 15 × 12	25.00 ± 0.30	15.00 ± 0.30	12.00 ± 0.30	1.030	60.2	58.7	3533	176.6	18
T25 × 15 × 12.5	25.00 ± 0.30	15.00 ± 0.30	12.50 ± 0.30	0.980	60.2	61.2	3681	176.6	19
T25 × 15 × 13	25.00 ± 0.30	15.00 ± 0.30	13.00 ± 0.30	0.950	60.2	63.6	3828	176.6	20
T25 × 15 × 15	25.00 ± 0.30	15.00 ± 0.30	15.00 ± 0.30	0.820	60.2	73.4	4417	176.6	23
T26 × 10 × 8.5	26.00 ± 0.30	10.00 ± 0.30	8.50 ± 0.30	0.77	48.77	62.94	3070		18.5
T26 × 16 × 15	26.00 ± 0.40	16.00 ± 0.30	15.00 ± 0.30	0.860	63.5	73.5	4666	201.0	24
T28 × 12.5 × 8	28.00 ± 0.40	12.50 ± 0.40	8.00 ± 0.30	0.98	57.19	58.63	3353		18.9
T28 × 14 × 12	28.00 ± 0.40	14.00 ± 0.40	12.00 ± 0.30	0.76	60.99	80.64	4918		26.6
T28 × 16 × 13	28.00 ± 0.40	16.00 ± 0.40	13.00 ± 0.30	0.860	65.6	76.0	4988	201.0	26
T28 × 16 × 16	28.00 ± 0.40	16.00 ± 0.40	16.00 ± 0.30	0.700	65.6	93.5	6139	201.0	32
T29 × 19 × 7.5	29.00 ± 0.75	19.00 ± 0.75	7.50 ± 0.55	1.980	73.2	37.0	2704	283.4	14
T29 × 19 × 12.5	29.00 ± 0.75	19.00 ± 0.75	12.50 ± 0.60	1.190	73.2	61.6	4507	283.4	22
T29 × 18.1 × 15 ^(R)	29.00 ± 0.50	18.10 ± 0.40	15.00 ± 0.40	0.89	71.32	80.16	57.7		29.0
T29 × 19 × 15 ^(R)	29.00 ± 0.50	19.00 ± 0.75	15.00 ± 0.55	0.990	73.2	73.9	5409	283.4	28



sales@shiruitech.com
www.shiruitech.com

HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

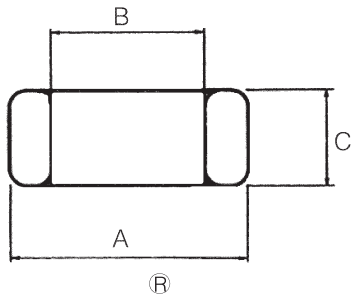

Note: 1)AL value

-Unit:nH/N²

-Measuring conditions:1kHz,0.25V, 25°C

-Tolerance: ± 25%(SR-10K,SR-12K: ± 30%)

2)Coating



-Toroid cores can be coated with epoxy or parylene.

-Isolation voltage:epoxy-DC 1000 V min,parylene-DC750Vmin

Electrical Characteristics AL value 电气特性								
Part No.	SR-4P	SR-2P	SR-5P	SR-5K	SR-6K	SR-7K	SR-10K	SR-12K
T22.1 × 13.7 × 6.35	1500	1700	1500	3100	3600	4600	6100	7300
T22.1 × 13.7 × 8	1800	2200	1900	3900	4600	5700	7700	9200
T22.1 × 13.7 × 11	2500	3100	2600	5400	6300	7900	10600	12700
T22.1 × 13.7 × 12.7	2900	3600	3100	6200	7300	9200	12200	14600
T22 × 14 × 8	1700	2100	1800	3700	4300	5400	7200	8600
T22 × 14 × 13	2800	3400	2900	6000	7000	8800	11700	14000
T22.5 × 12.5 × 8	2200	2800	2300	5100	5600	7000	9300	11100
T25 × 15 × 3	720	850	750	1600	1800	2250	3000	3600
T25 × 15 × 4	1000	1100	1000	3100	2400	3000	4000	4800
T25 × 15 × 5	1200	1400	1300	2600	3000	3750	5000	6000
T25 × 15 × 6	1500	1700	1500	3100	3600	4500	6000	7200
T25 × 15 × 10	2500	3000	2600	5210	6100	7700	10200	12200
T25 × 15 × 12	2900	3600	3100	6100	7300	9200	12200	14600
T25 × 15 × 12.5	3100	3700	3200	6500	7700	9600	12800	15400
T25 × 15 × 13	3200	3900	3300	6700	7900	9900	13200	15800
T25 × 15 × 15	3700	4500	3800	7800	9200	11500	15300	18400
T26 × 10 × 8.5	3500	4300	3700	7400	8800	11000	14600	17500
T26 × 16 × 15	3900	4800	4000	8900	9700	12000	15000	18000
T28 × 12.5 × 8	3000	3800	3200	7000	7600	9000	12000	14000
T28 × 14 × 12	3900	4900	4100	9000	9800	12000	15500	18500
T28 × 16 × 13	3500	4300	3700	7400	8800	11000	14600	21600
T28 × 16 × 16	4300	5300	4500	10000	10800	13500	18000	7600
T29 × 19 × 7.5	1500	1800	1600	3300	3800	4800	6300	12700
T29 × 19 × 12.5	2500	3100	2600	5400	6300	7900	10600	15200
T29 × 18.1 × 15 [®]	3300	4200	3500	7700	8400	10500	14000	16000
T29 × 19 × 15 [®]	3000	3700	3200	6400	7600	9500	12700	15200



TOROID CORES

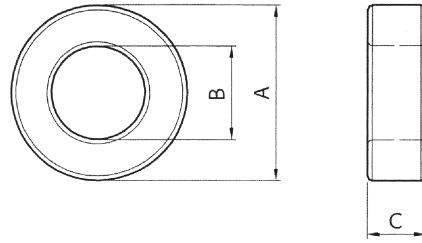


Dimensions in mm 尺寸				Core Set Parameters 磁芯参数					
Part No.	A	B	C	C1(mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Aw(mm ²)	W(g/set)
T29 × 19 × 16	29.00 ± 0.75	19.00 ± 0.75	16.00 ± 0.55	0.930	73.2	78.8	5769	283.4	30
T30 × 12 × 6	30.00 ± 0.50	12.00 ± 0.40	6.00 ± 0.30	1.14	57.56	50.27	2894		17.1
T31 × 19 × 13	31.00 ^{+0.50} _{-0.70}	19.00 ± 0.50	13.00 ± 0.40	0.990	75.5	76.5	5772	283.4	29
T31 × 20 × 15	31.00 ± 0.30	20.00 ^{+0.40} _{-0.20}	14.80 ± 0.20	0.955	77.6	81.2	6300	314	32.6
T31 × 19 × 17	31.00 ^{+0.50} _{-0.70}	19.00 ± 0.50	17.00 ± 0.40	0.760	75.5	100.0	7550	283.4	39
T31.8 × 19 × 11.5	31.75 ± 0.60	19.00 ± 0.50	11.50 ± 0.40	1.060	76.3	71.7	5474	283.4	28
T32 × 14 × 13	32.00 ± 0.50	14.00 ± 0.40	13.00 ± 0.40	0.58	64.61	110.4	7134		40.6
T36 × 23 × 10(R)	36.00 ± 0.50	23.00 ± 0.50	10.00 ± 0.30	1.400	89.7	63.9	5731	415.3	29
T36 × 23 × 10	36.00 ± 0.50	23.00 ± 0.50	10.00 ± 0.30	1.400	89.7	63.9	5731	415.3	30
T36 × 23 × 15(R)	36.00 ± 0.50	23.00 ± 0.50	15.00 ± 0.30	0.930	89.7	95.9	8596	415.3	43
T36 × 23 × 15	36.00 ± 0.50	23.00 ± 0.50	15.00 ± 0.30	0.940	89.6	95.8	8583	415.3	43
T38 × 19 × 13	38.10 ± 0.60	19.05 ± 0.60	12.70 ± 0.30	0.720	82.9	115.7	9585	284.9	53
T38 × 25 × 15	38.00 ± 0.50	25.00 ± 0.50	15.00 ± 0.50	1.00	96.17	96.02	9234		46.3
T38 × 19 × 16	38.10 ± 0.60	19.00 ± 0.60	15.90 ± 0.30	0.714	82.9	116	9630	284	65
T40 × 24 × 16	40.00 ± 0.60	24.00 ± 0.40	16.00 ± 0.30	0.769	96.3	125.3	12066	452	59
T41.8 × 26.2 × 12.5	41.80 ± 0.80	26.20 ± 0.60	12.50 ± 0.50	1.076	103.0	95.7	9860	539	55
T41.8 × 26.2 × 17.5	41.80 ± 0.80	26.20 ± 0.60	17.50 ± 0.50	0.769	103.0	134.0	13800	539	69
T44.5 × 30 × 15	44.45 ± 0.50	30.00 ± 0.40	15.00 ± 0.30	1.112	114.0	102.6	11691	707	56
T44.6 × 20 × 16	44.60 ± 0.50	20.00 ± 0.40	15.90 ± 0.30	0.493	91.4	185.4	16946	314	91
T47 × 27 × 15	47.00 ± 0.50	27.00 ± .50	15.00 ± 0.50	0.76	110.40	146.0	161.7		83.7
T48 × 30 × 15	48.00 ± 0.80	30.00 ± 0.80	15.00 ± 0.50	0.890	118.1	132.5	15657	706.5	78
T48 × 30 × 16	48.00 ± 0.80	30.00 ± 0.80	16.00 ± 0.50	0.840	118.1	141.4	16700	706.5	79
T49 × 34 × 10	49.10 ± 0.70	33.80 ± 0.75	10.00 ± 0.35	1.680	127.2	75.6	9616	896.8	44
T49 × 34 × 16	49.10 ± 0.70	33.80 ± 0.75	15.90 ± 0.35	1.060	127.2	120.2	15298	896.8	75



sales@shiruitech.com
www.shiruitech.com

HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

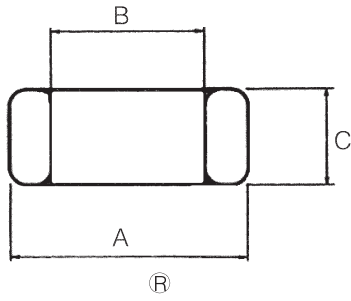

Note: 1)AL value

-Unit:nH/N²

-Measuring conditions:1kHz,0.25V, 25°C

-Tolerance: ± 25%(SR-10K,SR-12K: ± 30%)

2)Coating

-Toroid cores can be coated with epoxy or parylene.

-Isolation voltage:epoxy-DC 1000 V min,parylene-DC750Vmin

Electrical Characteristics AL value 电气特性								
Part No.	SR-4P	SR-2P	SR-5P	SR-5K	SR-6K	SR-7K	SR-10K	SR-12K
T29 × 19 × 16	3200	4000	3400	6900	8100	10100	13500	
T30 × 12 × 6	2600	3300	2700	6000	6600	8000	10500	
T31 × 19 × 13	3000	3700	3200	6500	7600	9500	12700	
T31 × 20 × 15	3100	3800	3200	6700	7800	11000	13000	
T31 × 19 × 17	4000	4900	4100	8500	9900	12400	16500	
T31.8 × 19 × 11.5	2800	3500	3000	6100	7100	8900	11900	
T32 × 14 × 13	5000	6000	5200	11000	12000	16000	20500	
T36 × 23 × 10 [®]	2200	2600	2200	4700	5400	6700	9000	
T36 × 23 × 10	2200	2600	2200	4700	5400	6700	9000	
T36 × 23 × 15 [®]	3200	4000	3400	7000	8100	10100	13500	
T36 × 23 × 15	3200	3900	3300	6900	8000	10000	13400	
T38 × 19 × 13	4200	5100	4400	8500	9450	12000	17000	
T38 × 25 × 15	3000	3700	3100	6900	7500	9000	11000	
T38 × 19 × 16	4900	6000	5100	10400	12200	15300	20400	
T40 × 24 × 16	3920	4800	4100	8400	9800	12300	16400	
T41.8 × 26.2 × 12.5	2800	3400	2900	6000	7000	8800	11700	
T41.8 × 26.2 × 17.5	3900	4800	4100	8400	9800	12300	16400	
T44.5 × 30 × 15	2700	3300	2800	5900	6800	8500	11300	
T44.6 × 20 × 16	6120	7400	6400	13000	15300	19100	25500	
T47 × 27 × 15	3900	4900	4100	9000	9800	11500	15500	
T48 × 30 × 15	3400	4100	3500	7300	8500	10600	14100	
T48 × 30 × 16	3600	4400	3700	7700	9000	11200	15000	
T49 × 34 × 10	1800	2100	1900	3900	4500	5600	7500	
T49 × 34 × 16	2800	3500	3000	6000	7100	8900	11900	




SHIRUI

HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

sales@shiruitech.com

www.shiruitech.com

TOROID CORES

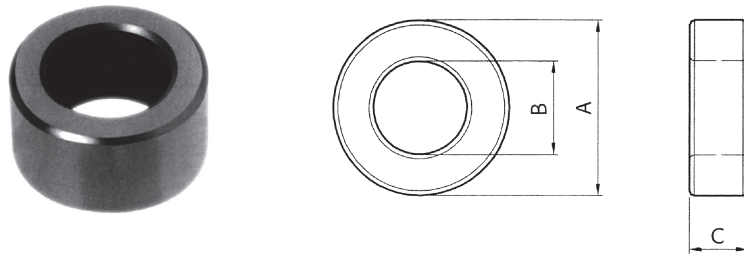


Dimensions in mm 尺寸				Core Set Parameters 磁芯参数					
Part No.	A	B	C	C1(mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	Aw(mm ²)	W(g/set)
T49×34×16 [®]	49.10±0.70	33.80±0.75	15.90±0.35	1.060	127.2	120.2	15298	896.8	73
T49×32×19	49.10±0.60	31.80±0.60	19.00±0.50	0.761	123.2	161.8	19900	794	100
T49×32×19 [®]	49.10±0.60	31.80±0.60	19.00±0.35	0.761	123.2	161.8	19700	794	99
T49×34×19	49.10±0.70	33.80±0.75	19.00±0.35	0.885	127.2	143.7	18200	897	90
T49×34×19 [®]	49.10±0.70	33.80±0.75	19.00±0.35	0.885	127.2	143.7	18279	897	87
T51.5×31.5×13.5 [®]	51.50±0.60	31.50±0.50	13.50±0.40	0.988	125.3	126.8	15888	779	79
T51.5×31.5×24.5 [®]	51.50±0.50	31.50±0.50	24.50±0.50	0.522	125.3	240	30070	779	143
T51.5×31.5×26	51.50±0.60	31.50±0.60	26.00±0.50	0.49	125.3	254.8	31932		162.6
T56×34×14	56.00±0.50	34.00±0.50	14.00±0.50	0.90	135.7	150.8	20457		104.5
T60×40×13	60.00±0.80	40.00±0.70	13.00±0.50	1.193	153.0	128.2	19615	1257	96
T60×40×18	60.00±0.80	40.00±0.70	18.00±0.50	0.860	152.9	177.6	27140	1256.0	135
T60×40×19.5	60.00±0.80	40.00±0.70	19.50±0.50	0.790	152.9	192.4	29402	1256.0	152
T60×36×25	60.00±0.60	36.00±0.60	25.00±0.50	0.49	144.2	293.0	42243		217.0
T60×40×25	60.00±0.80	40.00±0.70	25.00±0.50	0.620	152.9	246.6	37695	1256.0	187
T63×38×25	63.00±1.34	38.00±0.70	25.00±0.50	0.490	152.0	306.0	46512	1133.5	240
T63×38×25 [®]	63.00±1.34	38.00±0.75	25.00±0.50	0.507	152.0	300.0	45600	1134	238
T67.9×43.4×15	67.90±0.80	43.40±0.60	15.00±0.50	0.94	169.3	180.8	30603		154.1
T74×39×13	73.66±1.47	38.86±1.32	12.70±0.60	0.770	165.3	213.6	35298	1185.4	186
T74×39×20	73.66±1.47	38.86±1.32	20.00±0.60	0.491	165.3	336.6	55640	1186	290
T78×51×20	78.00±1.00	50.50±1.00	20.00±1.00	0.720	195.6	270.7	52958	2001.9	275
T78×51×22	78.00±1.00	50.50±1.00	22.00±1.00	0.660	195.6	297.8	58254	2001.9	293
T78×51×24	78.00±1.00	51.00±1.00	24.00±1.00	0.603	196.0	325.0	63700	2043	335
T85.7×55.5×25.4	85.70±1.00	55.50±0.80	25.40±0.50	0.57	214.8	377.2	81016		408.1
T100×60×30	100.00±2.00	60.00±2.00	30.00±0.50	0.418	251.0	600.0	150600	2827	725



sales@shiruitech.com
www.shiruitech.com

HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

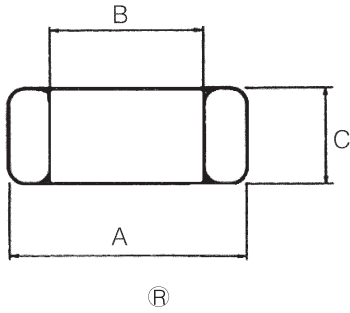

Note: 1)AL value

-Unit:nH/N²

-Measuring conditions:1kHz,0.25V, 25°C

-Tolerance: ± 25%(SR-10K,SR-12K: ± 30%)

2)Coating

-Toroid cores can be coated with epoxy or parylene.

-Isolation voltage:epoxy-DC 1000 V min,parylene-DC750Vmin

Electrical Characteristics AL value 电气特性								
Part No.	SR-4P	SR-2P	SR-5P	SR-5K	SR-6K	SR-7K	SR-10K	SR-12K
T49 × 34 × 16 [Ⓡ]	2800	3500	3000	6000	7100	8900	11900	
T49 × 32 × 19	4000	4900	4100	8500	9900	12400	16500	
T49 × 32 × 19 [Ⓡ]	3960	4900	4100	8500	9900	12400	16500	
T49 × 34 × 19	3400	4200	3600	7300	8500	10700	14200	
T49 × 34 × 19 [Ⓡ]	3200	4150	3330	7200	8500	10700	14200	
T51.5 × 31.5 × 13.5 [Ⓡ]	3050	3700	3170	6600	7600	9500	12700	
T51.5 × 31.5 × 24.5 [Ⓡ]	6000	7300	6200	12800	15000	18700	25000	
T51.5 × 31.5 × 26	6000	7000	6400	13500	14500	18500	23000	
T56 × 34 × 14	3300	4050	3400	7600	8200	10000	12000	
T60 × 40 × 13	2530	3100	2600	5400	6300	7900	10500	
T60 × 40 × 18	3500	4300	3700	7500	8800	11000	14600	
T60 × 40 × 19.5	3800	4700	4000	8200	9500	11900	15900	
T60 × 36 × 25	6050	7600	6400	13500	14800	18500	24500	
T60 × 40 × 25	4900	5900	5100	10300	12200	15200	20300	
T63 × 38 × 25	6200	7500	6400	13400	15400	19500	25700	
T63 × 38 × 25 [Ⓡ]	5500	7300	5700	13100	15400	19200	24000	
T67.9 × 43.4 × 15	3200	4000	3300	7300	8000	10000	13000	
T74 × 39 × 13	3900	4700	4100	8500	9800	12200	16300	
T74 × 39 × 20	6140	7500	6400	13100	15400	19200	25600	
T78 × 51 × 20	4200	5100	4400	9000	10500	13100	17500	
T78 × 51 × 22	4600	5500	4800	9800	11400	14300	19000	
T78 × 51 × 24	4700	5700	4800	10700	12500	15600	20500	
T85.7 × 55.5 × 25.4	5200	6600	5500	12000	13000	16500	22000	
T100 × 60 × 30	6600	8100	6900	14500	17000	21000	28000	



SHIRUI

HEFEI SHIRUI ELECTRONIC TECHNOLOGY CO.,LTD

sales@shiruitech.com

www.shiruitech.com