

SURFACE MOUNT COMMON MODE CHOKES


Features:

- Small surface mount package.
- Designed for 4 wire links, ISDN-S/T and T1'E1/CEPT.
- High frequency choke for EMI reduction.
- Low frequency choke for improved longitudinal balance in ISDN-S/T links.

Electrical Specifications @ 25°C-- Operating Temperature -40°C to +85°C

Part Number	OCL Primary (±30%)	LL Sec (Uh Max)	Cw/w (pF Max)	DCR (ΩMax)	Isolation (Vrms Min)
SR-MC8005	4.7mH	2.5	75	1.4	500
SR-MC8006	470uH	0.9	30	0.6	500

Mechanical

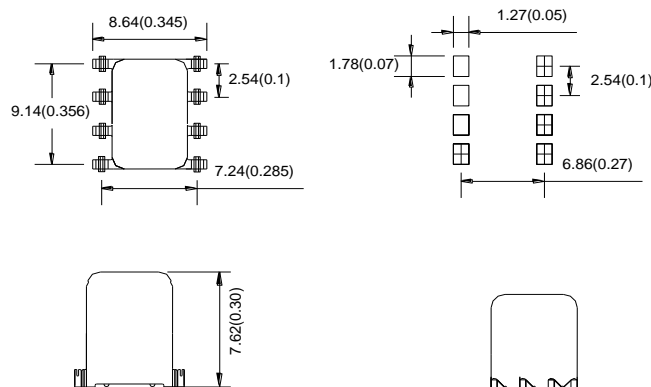

Schematic

