

# Encapsulated Transformers



Type: EI48/20

Hefei Shirui Electronic Technology Co.,Ltd


10VA/12VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)




Dimension (mm)

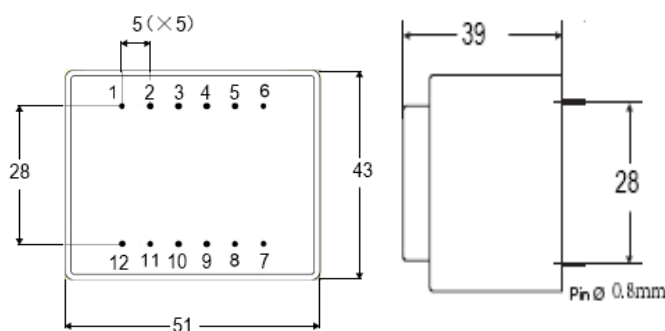

Empty pin shall be omitted if necessary

## Circuit Diagram

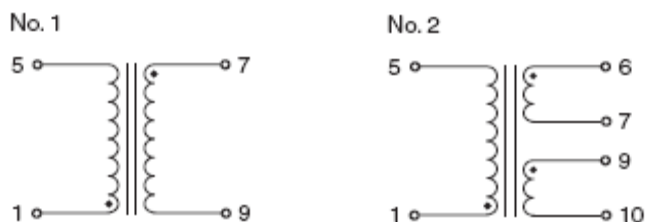

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI4820001	EI4820101	6/1667	10	1
EI4820002	EI4820102	6/2000	12	1
EI4820003	EI4820103	9/1111	10	1
EI4820004	EI4820104	9/1333	12	1
EI4820005	EI4820105	12/833	10	1
EI4820006	EI4820106	12/1000	12	1
EI4820007	EI4820107	15/667	10	1
EI4820008	EI4820108	15/800	12	1
EI4820009	EI4820109	18/556	10	1
EI4820010	EI4820110	18/667	12	1
EI4820011	EI4820111	24/417	10	1
EI4820012	EI4820112	24/500	12	1
EI4820013	EI4820113	2×6/833	10	2
EI4820014	EI4820114	2×6/1000	12	2
EI4820015	EI4820115	2×9/556	10	2
EI4820016	EI4820116	2×9/667	12	2
EI4820017	EI4820117	2×12/417	10	2
EI4820018	EI4820118	2×12/500	12	2
EI4820019	EI4820119	2×15/333	10	2
EI4820020	EI4820120	2×15/400	12	2
EI4820021	EI4820121	2×18/278	10	2
EI4820022	EI4820122	2×18/333	12	2
EI4820023	EI4820123	2×24/208	10	2
EI4820024	EI4820124	2×24/250	12	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com