

Encapsulated Transformers



Type: EI48/16

Hefei Shirui Electronic Technology Co.,Ltd


8VA/10VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)




Dimension (mm)

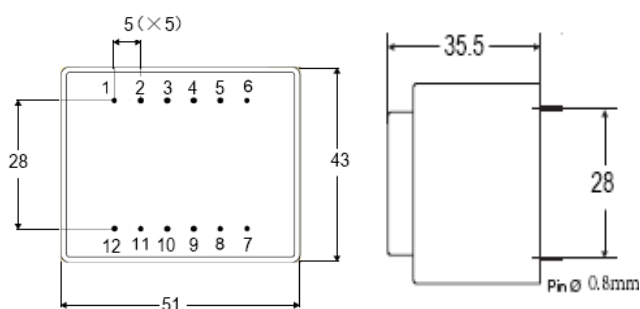

Empty pin shall be omitted if necessary

Circuit Diagram

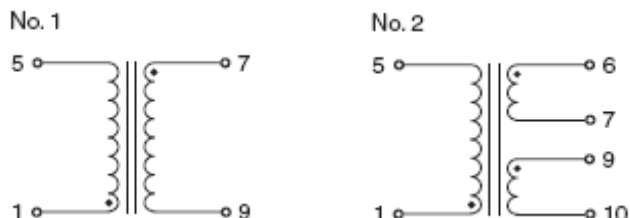

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI4816001	EI4816101	6/1333	8	1
EI4816002	EI4816102	6/1667	10	1
EI4816003	EI4816103	9/889	8	1
EI4816004	EI4816104	9/1111	10	1
EI4816005	EI4816105	12/667	8	1
EI4816006	EI4816106	12/833	10	1
EI4816007	EI4816107	15/533	8	1
EI4816008	EI4816108	15/667	10	1
EI4816009	EI4816109	18/444	8	1
EI4816010	EI4816110	18/556	10	1
EI4816011	EI4816111	24/333	8	1
EI4816012	EI4816112	24/417	10	1
EI4816013	EI4816113	2×6/667	8	2
EI4816014	EI4816114	2×6/833	10	2
EI4816015	EI4816115	2×9/444	8	2
EI4816016	EI4816116	2×9/556	10	2
EI4816017	EI4816117	2×12/333	8	2
EI4816018	EI4816118	2×12/417	10	2
EI4816019	EI4816119	2×15/267	8	2
EI4816020	EI4816120	2×15/333	10	2
EI4816021	EI4816121	2×18/222	8	2
EI4816022	EI4816122	2×18/278	10	2
EI4816023	EI4816123	2×24/167	8	2
EI4816024	EI4816124	2×24/208	10	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com