

Encapsulated Transformers



Type: EI38/14

Hefei Shirui Electronic Technology Co.,Ltd


3.5VA/4VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+ 70°C max)
- Insulation class—Class B(130°C)




Dimension (mm)

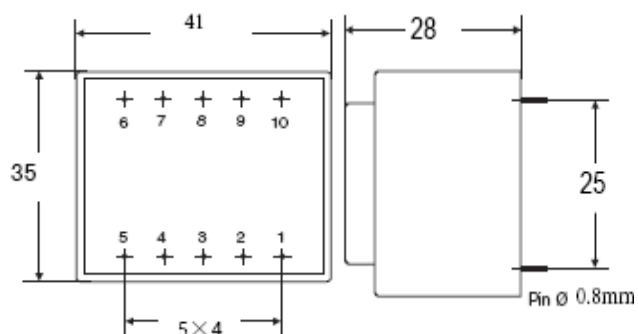

Empty pin shall be omitted if necessary

Circuit Diagram

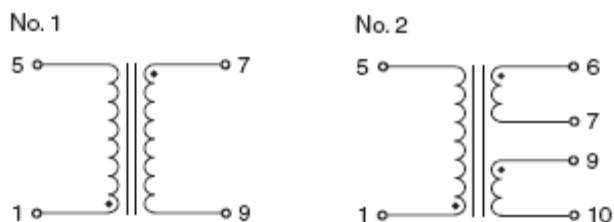

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI3814001	EI3814101	6/583	3.5	1
EI3814002	EI3814102	6/666	4	1
EI3814003	EI3814103	9/389	3.5	1
EI3814004	EI3814104	9/444	4.0	1
EI3814005	EI3814105	12/292	3.5	1
EI3814006	EI3814106	12/333	4	1
EI3814007	EI3814107	15/233	3.5	1
EI3814008	EI3814108	15/266	4	1
EI3814009	EI3814109	18/194	3.5	1
EI3814010	EI3814110	18/222	4	1
EI3814011	EI3814111	24/146	3.5	1
EI3814012	EI3814112	24/166	4	1
EI3814013	EI3814113	2×6/292	3.5	2
EI3814014	EI3814114	2×6/333	4	2
EI3814015	EI3814115	2×9/194	3.5	2
EI3814016	EI3814116	2×9/222	4	2
EI3814017	EI3814117	2×12/146	3.5	2
EI3814018	EI3814118	2×12/166	4	2
EI3814019	EI3814119	2×15/117	3.5	2
EI3814020	EI3814120	2×15/133	4	2
EI3814021	EI3814121	2×18/97	3.5	2
EI3814022	EI3814122	2×18/111	4	2
EI3814023	EI3814123	2×24/73	3.5	2
EI3814024	EI3814124	2×24/83	4	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com