

Encapsulated Transformers



Type: EI30/23

Hefei Shirui Electronic Technology Co.,Ltd


2.8VA/3.2VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)
- Short-circuit-proof




Dimension (mm)

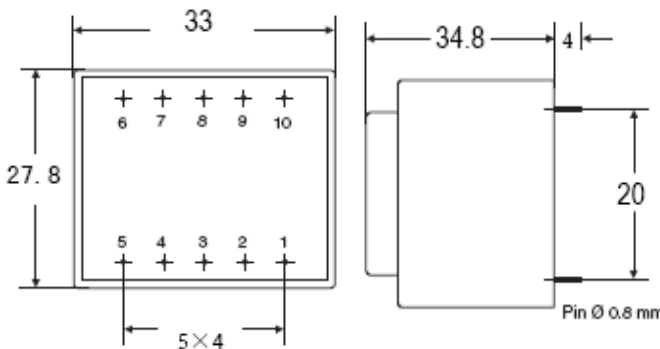

Empty pin shall be omitted if necessary

Circuit Diagram

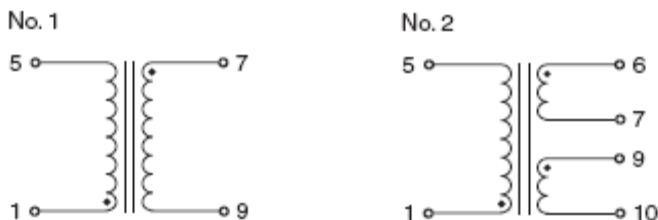

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI3023001	EI3023101	6/467	2.8	1
EI3023002	EI3023102	6/533	3.2	1
EI3023003	EI3023103	9/311	2.8	1
EI3023004	EI3023104	9/356	3.2	1
EI3023005	EI3023105	12/233	2.8	1
EI3023006	EI3023106	12/267	3.2	1
EI3023007	EI3023107	15/187	2.8	1
EI3023008	EI3023108	15/213	3.2	1
EI3023009	EI3023109	18/156	2.8	1
EI3023010	EI3023110	18/178	3.2	1
EI3023011	EI3023111	24/117	2.8	1
EI3023012	EI3023112	24/133	3.2	1
EI3023013	EI3023113	2×6/233	2.8	2
EI3023014	EI3023114	2×6/267	3.2	2
EI3023015	EI3023115	2×9/156	2.8	2
EI3023016	EI3023116	2×9/178	3.2	2
EI3023017	EI3023117	2×12/117	2.8	2
EI3023018	EI3023118	2×12/133	3.2	2
EI3023019	EI3023119	2×15/93	2.8	2
EI3023020	EI3023120	2×15/107	3.2	2
EI3023021	EI3023121	2×18/78	2.8	2
EI3023022	EI3023122	2×18/89	3.2	2
EI3023023	EI3023123	2×24/58	2.8	2
EI3023024	EI3023124	2×24/67	3.2	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com