

Encapsulated Transformers



Type: EI30/18

Hefei Shirui Electronic Technology Co.,Ltd


2.3VA/2.8VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)
- Short-circuit-proof




Dimension (mm)

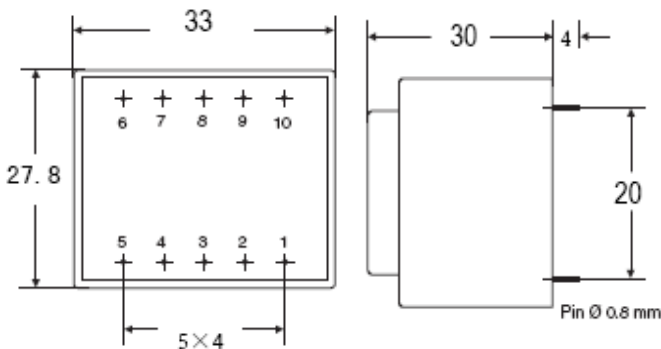

Empty pin shall be omitted if necessary

Circuit Diagram

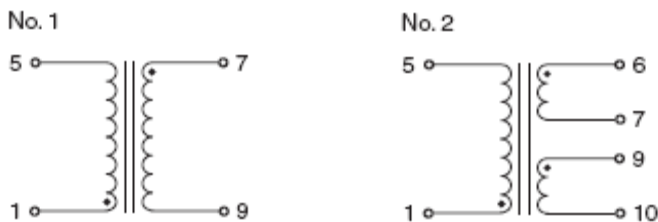

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI3018001	EI3018101	6/383	2.3	1
EI3018002	EI3018102	6/467	2.8	1
EI3018003	EI3018103	9/256	2.3	1
EI3018004	EI3018104	9/311	2.8	1
EI3018005	EI3018105	12/192	2.3	1
EI3018006	EI3018106	12/233	2.8	1
EI3018007	EI3018107	15/153	2.3	1
EI3018008	EI3018108	15/187	2.8	1
EI3018009	EI3018109	18/128	2.3	1
EI3018010	EI3018110	18/156	2.8	1
EI3018011	EI3018111	24/96	2.3	1
EI3018012	EI3018112	24/117	2.8	1
EI3018013	EI3018113	2×6/192	2.3	2
EI3018014	EI3018114	2×6/233	2.8	2
EI3018015	EI3018115	2×9/128	2.3	2
EI3018016	EI3018116	2×9/156	2.8	2
EI3018017	EI3018117	2×12/96	2.3	2
EI3018018	EI3018118	2×12/117	2.8	2
EI3018019	EI3018119	2×15/77	2.3	2
EI3018020	EI3018120	2×15/93	2.8	2
EI3018021	EI3018121	2×18/64	2.3	2
EI3018022	EI3018122	2×18/78	2.8	2
EI3018023	EI3018123	2×24/48	2.3	2
EI3018024	EI3018124	2×24/58	2.8	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com