

# Encapsulated Transformers



Type: EI30/15

Hefei Shirui Electronic Technology Co.,Ltd


2VA/2.4VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)
- Short-circuit-proof




Dimension (mm)

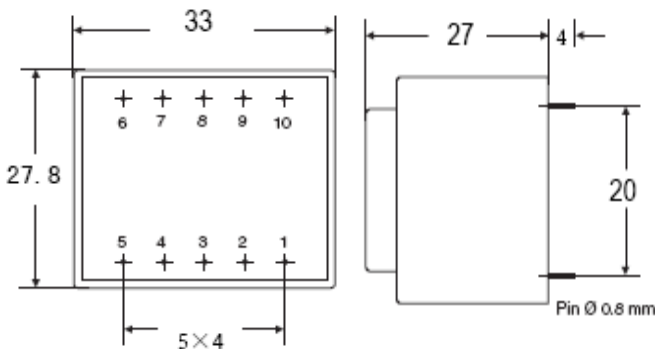

Empty pin shall be omitted if necessary

Circuit Diagram

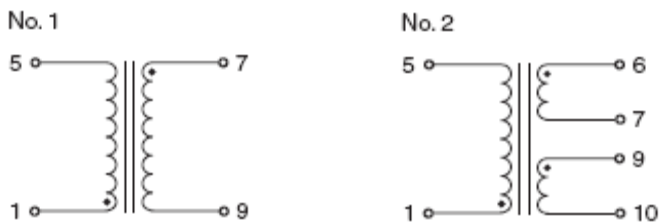

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI3015001	EI3015101	6/333	2	1
EI3015002	EI3015102	6/400	2.4	1
EI3015003	EI3015103	9/222	2	1
EI3015004	EI3015104	9/267	2.4	1
EI3015005	EI3015105	12/167	2	1
EI3015006	EI3015106	12/200	2.4	1
EI3015007	EI3015107	15/133	2	1
EI3015008	EI3015108	15/160	2.4	1
EI3015009	EI3015109	18/111	2	1
EI3015010	EI3015110	18/133	2.4	1
EI3015011	EI3015111	24/83	2	1
EI3015012	EI3015112	24/100	2.4	1
EI3015013	EI3015113	2×6/167	2	2
EI3015014	EI3015114	2×6/200	2.4	2
EI3015015	EI3015115	2×9/111	2	2
EI3015016	EI3015116	2×9/133	2.4	2
EI3015017	EI3015117	2×12/83	2	2
EI3015018	EI3015118	2×12/100	2.4	2
EI3015019	EI3015119	2×15/67	2	2
EI3015020	EI3015120	2×15/80	2.4	2
EI3015021	EI3015121	2×18/56	2	2
EI3015022	EI3015122	2×18/67	2.4	2
EI3015023	EI3015123	2×24/42	2	2
EI3015024	EI3015124	2×24/50	2.4	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com