

# Encapsulated Transformers



Type: EI30/12.5

Hefei Shirui Electronic Technology Co.,Ltd


1.5VA/1.8VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)
- Short-circuit-proof




Dimension (mm)

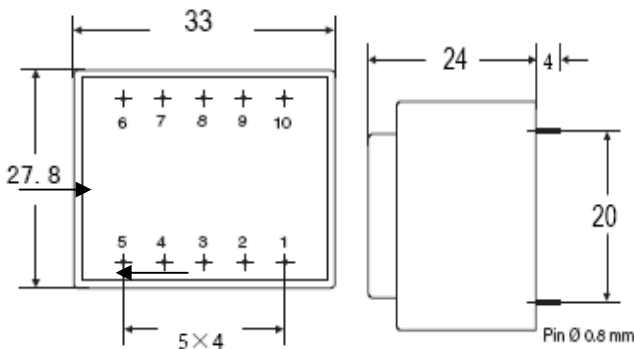

Empty pin shall be omitted if necessary

Circuit Diagram

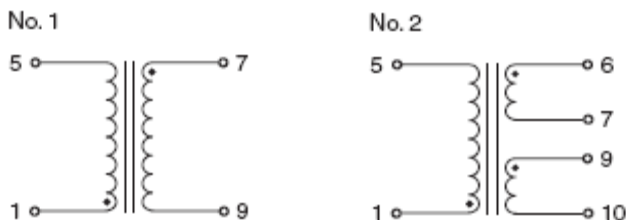

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI3012001	EI3012101	6/250	1.5	1
EI3012002	EI3012102	6/300	1.8	1
EI3012003	EI3012103	9/167	1.5	1
EI3012004	EI3012104	9/200	1.8	1
EI3012005	EI3012105	12/125	1.5	1
EI3012006	EI3012106	12/150	1.8	1
EI3012007	EI3012107	15/100	1.5	1
EI3012008	EI3012108	15/120	1.8	1
EI3012009	EI3012109	18/83	1.5	1
EI3012010	EI3012110	18/100	1.8	1
EI3012011	EI3012111	24/63	1.5	1
EI3012012	EI3012112	24/75	1.8	1
EI3012013	EI3012113	2×6/125	1.5	2
EI3012014	EI3012114	2×6/150	1.8	2
EI3012015	EI3012115	2×9/83	1.5	2
EI3012016	EI3012116	2×9/100	1.8	2
EI3012017	EI3012117	2×12/63	1.5	2
EI3012018	EI3012118	2×12/75	1.8	2
EI3012019	EI3012119	2×15/50	1.5	2
EI3012020	EI3012120	2×15/60	1.8	2
EI3012021	EI3012121	2×18/42	1.5	2
EI3012022	EI3012122	2×18/50	1.8	2
EI3012023	EI3012123	2×24/31	1.5	2
EI3012024	EI3012124	2×24/38	1.8	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com