

Encapsulated Transformers



Type: EI30/10.5

Hefei Shirui Electronic Technology Co.,Ltd


1.2VA/1.5VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)
- Short-circuit-proof




Dimension (mm)

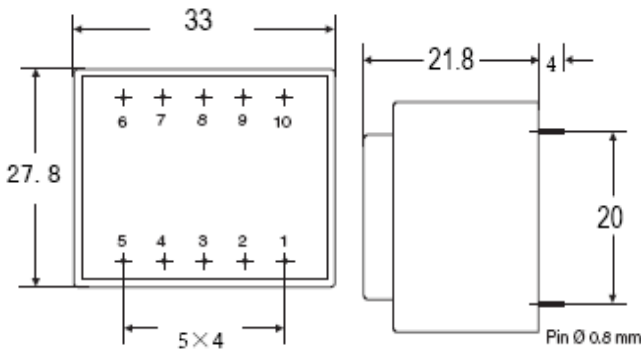

Empty pin shall be omitted if necessary

Circuit Diagram

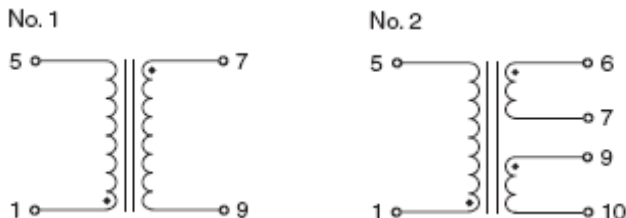

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI3010001	EI3010101	6/200	1.2	1
EI3010002	EI3010102	6/250	1.5	1
EI3010003	EI3010103	9/133	1.2	1
EI3010004	EI3010104	9/166	1.5	1
EI3010005	EI3010105	12/100	1.2	1
EI3010006	EI3010106	12/125	1.5	1
EI3010007	EI3010107	15/80	1.2	1
EI3010008	EI3010108	15/100	1.5	1
EI3010009	EI3010109	18/67	1.2	1
EI3010010	EI3010110	18/83	1.5	1
EI3010011	EI3010111	24/50	1.2	1
EI3010012	EI3010112	24/62	1.5	1
EI3010013	EI3010113	2×6/100	1.2	2
EI3010014	EI3010114	2×6/125	1.5	2
EI3010015	EI3010115	2×9/67	1.2	2
EI3010016	EI3010116	2×9/83	1.5	2
EI3010017	EI3010117	2×12/50	1.2	2
EI3010018	EI3010118	2×12/62	1.5	2
EI3010019	EI3010119	2×15/40	1.2	2
EI3010020	EI3010120	2×15/50	1.5	2
EI3010021	EI3010121	2×18/33	1.2	2
EI3010022	EI3010122	2×18/42	1.5	2
EI3010023	EI3010123	2×24/25	1.2	2
EI3010024	EI3010124	2×24/31	1.5	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com