

Encapsulated Transformers



Type: EI30/05

Hefei Shirui Electronic Technology Co.,Ltd


0.5VA/0.6VA

Customer demand is our developing engine

- CE approved
- Potted under vacuum
- Dielectric strength—4000Vrms
- High ambient operation temperature(+70°C max)
- Insulation class—Class B(130°C)
- Short-circuit-proof




Dimension (mm)

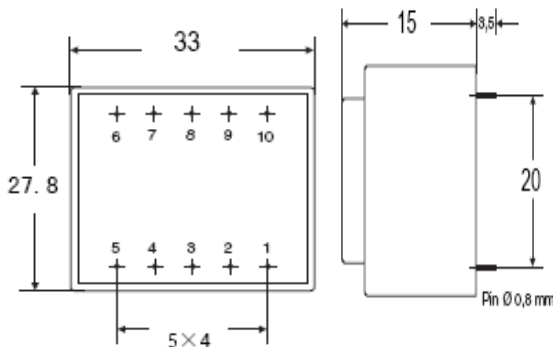

Empty pin shall be omitted if necessary

Circuit Diagram

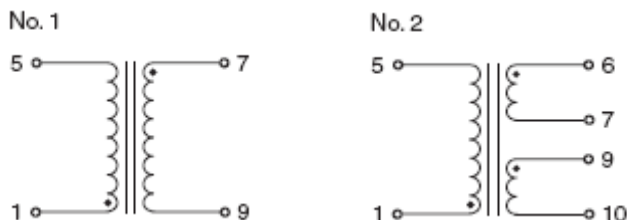

Primary (230V)	Primary (115V)	Secondary (V/mA)	Power (VA)	Circuit Diagram
EI3005001	EI3005101	6/83	0.5	1
EI3005002	EI3005102	6/100	0.6	1
EI3005003	EI3005103	9/56	0.5	1
EI3005004	EI3005104	9/67	0.6	1
EI3005005	EI3005105	12/42	0.5	1
EI3005006	EI3005106	12/50	0.6	1
EI3005007	EI3005107	15/33	0.5	1
EI3005008	EI3005108	15/40	0.6	1
EI3005009	EI3005109	18/28	0.5	1
EI3005010	EI3005110	18/33	0.6	1
EI3005011	EI3005111	24/21	0.5	1
EI3005012	EI3005112	24/25	0.6	1
EI3005013	EI3005113	2×6/42	0.5	2
EI3005014	EI3005114	2×6/50	0.6	2
EI3005015	EI3005115	2×9/28	0.5	2
EI3005016	EI3005116	2×9/33	0.6	2
EI3005017	EI3005117	2×12/21	0.5	2
EI3005018	EI3005118	2×12/25	0.6	2
EI3005019	EI3005119	2×15/17	0.5	2
EI3005020	EI3005120	2×15/20	0.6	2
EI3005021	EI3005121	2×18/14	0.5	2
EI3005022	EI3005122	2×18/17	0.6	2
EI3005023	EI3005123	2×24/10	0.5	2
EI3005024	EI3005124	2×24/13	0.6	2

Provide customized transformer

TEL:86-551-65547975 FAX:86-551-65546304

www.shiruitech.com E-mail:sales@shiruitech.com