


貼片一體成型電感(圓線)

SRM0850 SERIES

PACKAGING DIMENSION: [Unit: mm]

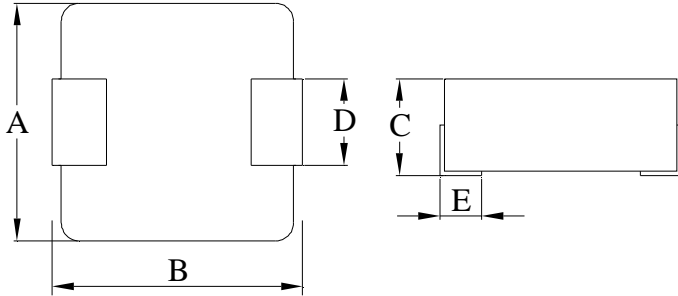

A	7.2 ± 0.3
B	7.8 ± 0.3
C	5.0 MAX
D	3.0 ± 0.3
E	1.6 ± 0.5

GENERAL SPECIFICATIONS:

**RoHS
COMPLIANT**

P/N	L0 Inductance μH ±20% @0A	DCR (mΩ)		Heat Rating Current	Saturation Current
		[Typical]	[Max]	Idc (Amp)	Isat (Amp)
				Typical	Typical
SRM0850-100M	10.0				
SRM0850-150M	15.0				
SRM0850-220M	22.0	108	140.0	3.0	4.0
SRM0850-330M	33.0	130	150.0	2.5	3.5
SRM0850-470M	47.0	208	249.0	2	3

⊙ All test Data is referenced to 25°C ambient

⊙ Typical Heat Rating DC Current would cause an approximately ΔT of 40°C

⊙ Typical Saturation DC Current would cause Lo to drop approximately 30%

△ Operating Temperature Range: -55°C to +125°C