


貼片一體成型電感(圓線)

SRM104ET SERIES

PACKAGING DIMENSION: [Unit: mm]

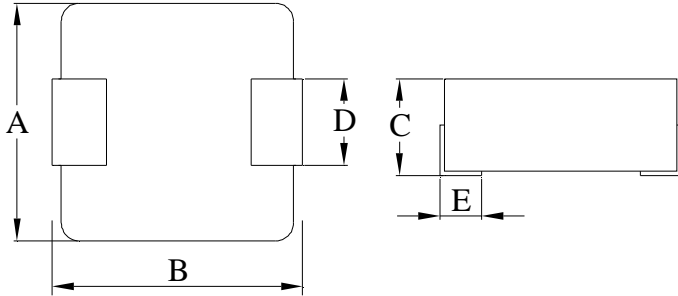

A	10.0 ± 0.3
B	11.5 MAX
C	4.0 MAX
D	3.0 ± 0.5
E	2.5 ± 0.5

GENERAL SPECIFICATIONS:

**RoHS
COMPLIANT**

P/N	L0 Inductance μH ±20% @0A	DCR (mΩ)		Heat Rating Current	Saturation Current
		[Typical]	[Max]	Idc (Amp)	Isat (Amp)
				Typical	Typical
SRM104ET-1R0M	1.0	2.70	3.20	22.0	34
SRM104ET-2R2M	2.2	5.80	7.00	12	25.5
SRM104ET-3R3M	3.3	11.00	13.20	11	14.5
SRM104ET-4R7M	4.7	13.20	15.00	10.0	13
SRM104ET-5R6M	5.6	16.00	18.50	8.5	11
SRM104ET-6R8M	6.8	21.50	24.00	7.5	9.5

- ⊙ All test Data is referenced to 25°C ambient
- ⊙ Typical Heat Rating DC Current would cause an approximately ΔT of 40°C
- ⊙ Typical Saturation DC Current would cause Lo to drop approximately 30%
- △ Operating Temperature Range: -55°C to +125°C